



Cavity Diplexers

- ◆ High Rejection
- ◆ Low Insertion Loss
- ◆ Miniaturization
- ◆ Excellent Reliability
- ◆ Customization available



Electrical Specifications

Parameters	Units		ANT-RX	ANT-TX
Pass Band Frequency	MHz		1160-1615	2200-2505
Insertion Loss	dB	Max	0.5	0.5
Ripple	dB	Max	TBD	TBD
Return Loss	dB	Min	14	14
Group Delay Variation	ns	Max	TBD	TBD
Phase Matching	deg	Max	TBD	TBD
Rejection	dB	Min	75@1100MHz; 80@1699MHz	50@2180MHz; 80@2090MHz; 80@2680MHz
Isolation	TBD			
Power Handling	50W max			
Port Sign	Port 1: ANT ; Port 2: RX ; Port 3:TX			

50 ohms Coaxial Cavity Diplexers


SN:2085-200129 Version: A0


Mechanical Specifications		Environmental Specification	
Parameter	Specification	Parameter	Specification
ANT Connector	SMA-Female (50Ω)	Operating Temp.	-40°C to +70°C
Rx and Tx Connectors	SMA-Female (50Ω)	Storage Temp.	-55°C to +85°C
ROHS	Yes	Environment Class	TBD
Material	Aluminum (6061)	Altitude	30,000 ft.
Weight(Kg)	TBD		(Epoxy Sealed Controlled environment)
Surface Finish	Black Painted	Humidity	95%RH at 40°C
Shock	20G for 11msec half sine wave,3 axis both directions		
Note			

Outline Drawing:

All Dimensions in mm (inches)

Outline Tolerances ±0.3(0.012)

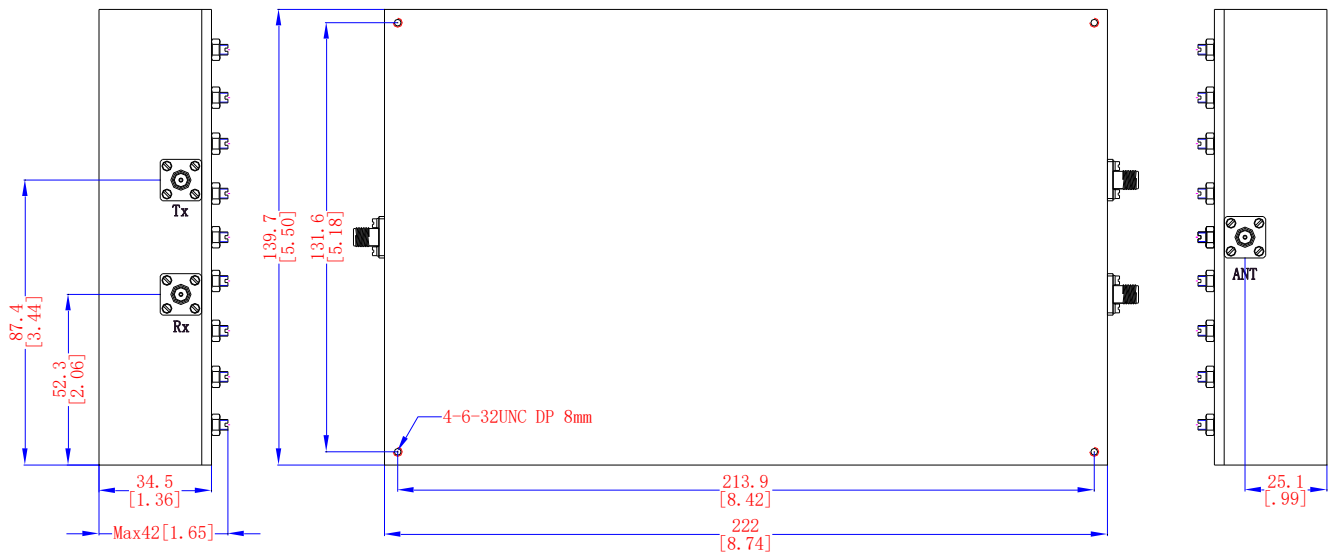

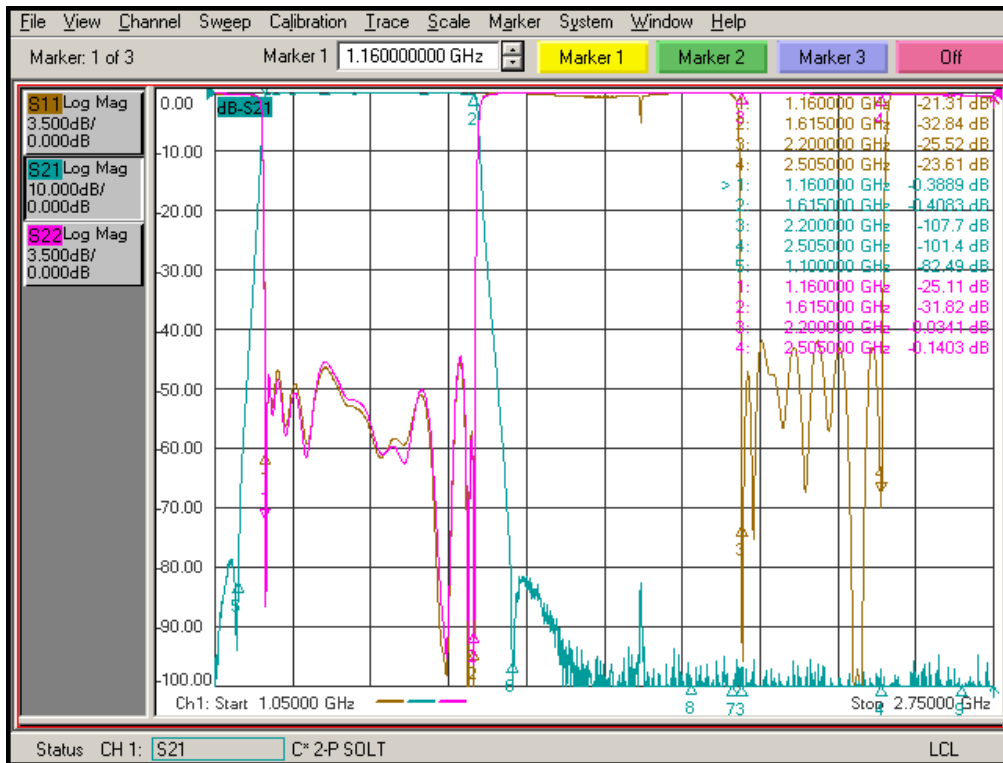Test Plot

Test Plot
