

50 ohms 20dB SMA-Female Directional Coupler From 0.4GHz to 6GHz Rated at 50 Watts



### Directional Coupler

- ♦ Low Insertion Loss
- ♦ Low Coupling Flatness
- ♦ High Directivity
- ♦ Excellent Reliability
- ♦ Customization available

The HRT-DQ(400/6000)-20S is a 20dB directional coupler that operates from 0.4 to 6 GHz and can handle up to 50 Watts . This SMA directional coupler offers 16 dB directivity and 1.3:1 max VSWR. The package interface uses SMA on all of the ports.



Electrical Specifications			
Parameters	Units		Specifications
Frequency Range	MHz		400-6000
Nominal Coupling	dB		20
Nominal Coupling Loss	dB		0.04
Coupling Flatness	dB	Max	±1.2
Directivity	dB	Min	16
Insertion Loss (Excluding Nominal Coupling Loss)	dB	Max	0.7
VSWR Primary	/	Max	1.3:1
VSWR Secondary	/	Max	1.3:1
Power Handling	50 Watts cw (Forward Power)		


50 ohms 20dB SMA-Female Directional Coupler From 0.4GHz to 6GHz Rated at 50 Watts

Mechanical Specifications		Environmental Specification	
Parameter	Specification	Parameter	Specification
Input and Output Connectors	SMA-Female (50Ω)	Operating Temp.	-40°C to +70°C
Coupling Port Connector	SMA-Female (50Ω)	Storage Temp.	-55°C to +85°C
ROHS	Yes	Environment Class	TBD
Material	Aluminum (6061)	Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
Weight(Kg)	TBD		
Surface Finish	Black Painted	Humidity	95%RH at 40°C
Shock	20G for 11msec half sine wave,3 axis both directions		
Note			

### Outline Drawing:


All Dimensions in mm (inches)

Outline Tolerances ±0.3(0.012)

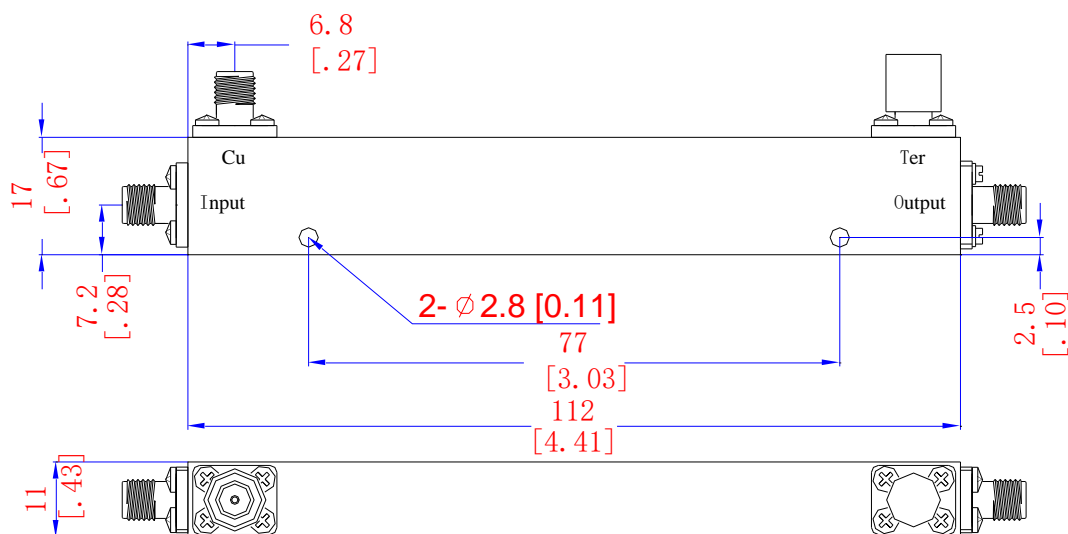


50 ohms 20dB SMA-Female Directional Coupler From 0.4GHz to 6GHz Rated at 50 Watts


## VSWR Primary

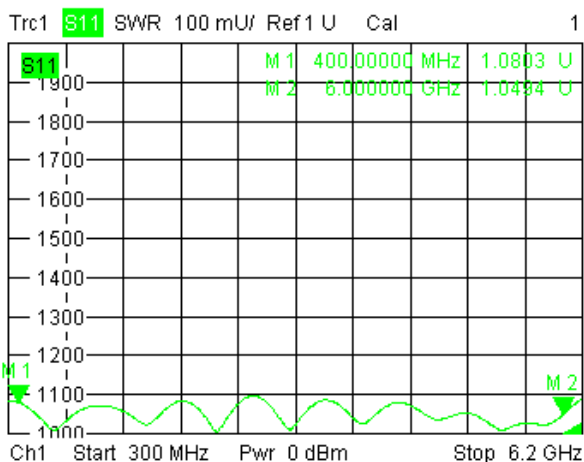


## VSWR Secondary

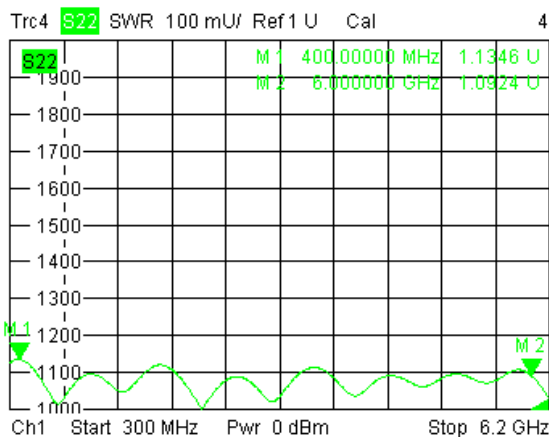

## Coupling

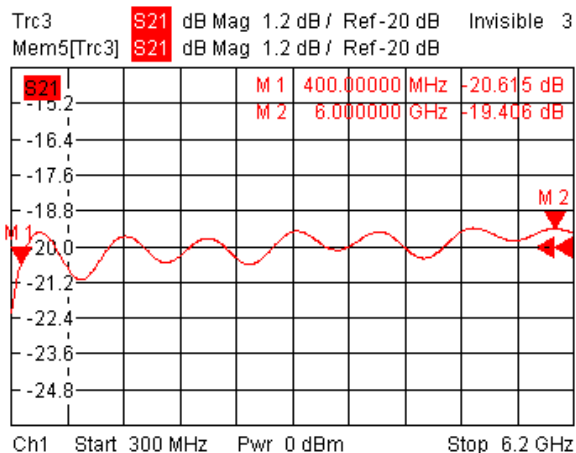

## Directivity

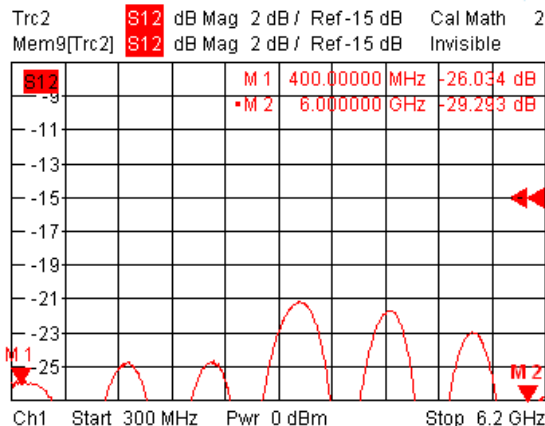

## Insertion Loss

