

**90deg Hybrid Coupler 2.92 Connectors From 18GHz to 40GHz Rated at 30 Watts**

**Hybrid Coupler**

- ◆ 90° Hybrid Coupler
- ◆ Low Insertion Loss
- ◆ Low Phase Balance
- ◆ Wide Frequency Range
- ◆ Excellent Reliability

The HRT-HC(18000/40000)-90K is a 90 degree hybrid coupler that operates from 18 to 40 GHz and can handle up to 30 Watts . This hybrid coupler offers 12 dB Isolation and 1.8:1 max VSWR. The package interface uses 2.92-Female on all of the ports.


**Electrical Specifications**

Parameters	Units		Specifications
Pass Band Frequency	MHz		6000-26500
Nominal Coupling	dB		3.0
Nominal Degree	deg		90
Insertion Loss ( Excluding Nominal Coupling Loss)	dB	Max	2.5
VSWR	/	Max	1.8:1
Isolation	/	Min	12
Amp. Unbalance	dB	Max	±0.9
Phase Unbalance	Deg	Max	±12
Power Handling	20 Watts(Average Power)		
Electrical Specification Notes	Values at +25°C.		


**90deg Hybrid Coupler 2.92 Connectors From 18GHz to 40GHz Rated at 30 Watts**

Mechanical Specifications		Environmental Specification	
Parameter	Specification	Parameter	Specification
Input Connectors	2.92-Female (50Ω)	Operating Temp.	-40°C to +70°C
Output Connectors	2.92-Female (50Ω)	Storage Temp.	-55°C to +85°C
ROHS	Yes	Environment Class	TBD
Material	Aluminum (6061)	Altitude	30,000 ft.
Weight(Kg)	TBD		(Epoxy Sealed Controlled environment)
Surface Finish	Black Painted	Humidity	95%RH at 40°C
Shock	20G for 11msec half sine wave,3 axis both directions		
Note			

**Outline Drawing:**


All Dimensions in mm (inches)

Outline Tolerances  $\pm 0.3(0.012)$

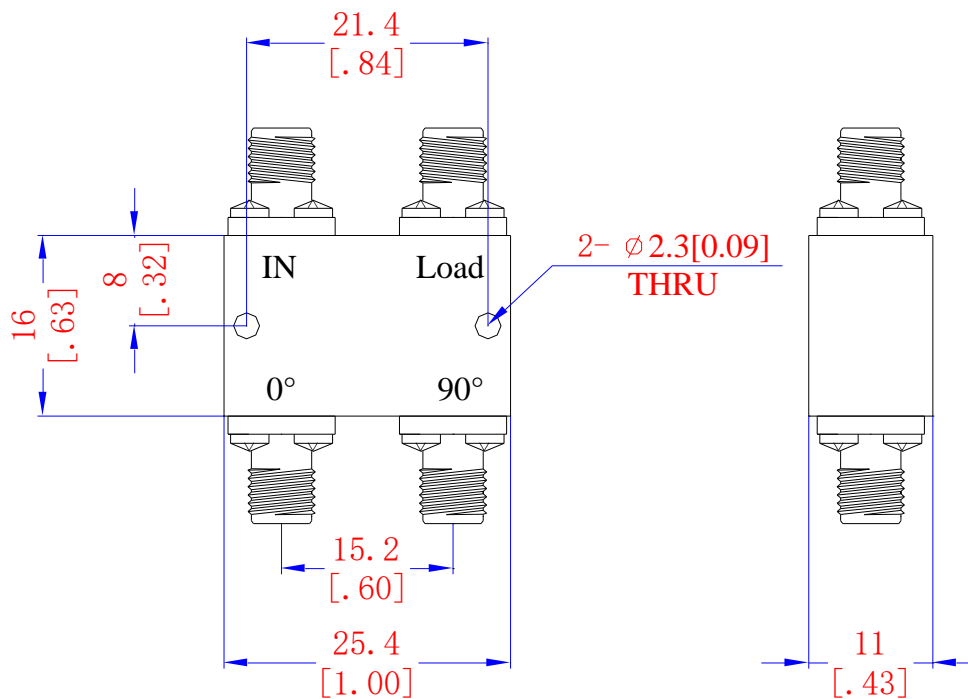


## 90deg Hybrid Coupler 2.92 Connectors From 18GHz to 40GHz Rated at 30 Watts


### Input VSWR

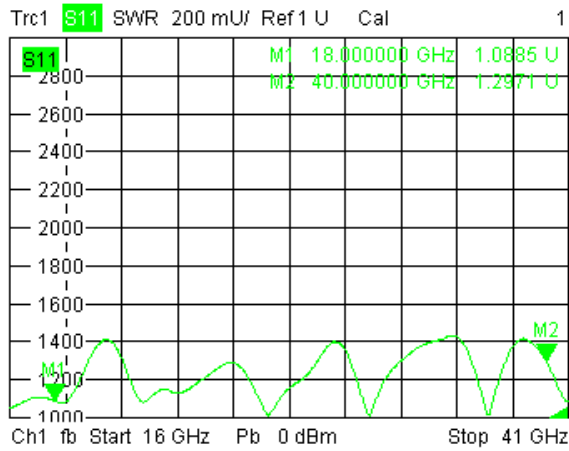


### Output VSWR

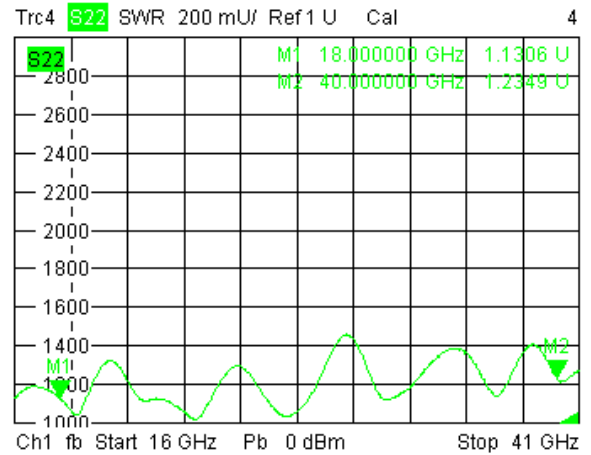

### Loss & Amplitude Unbalance

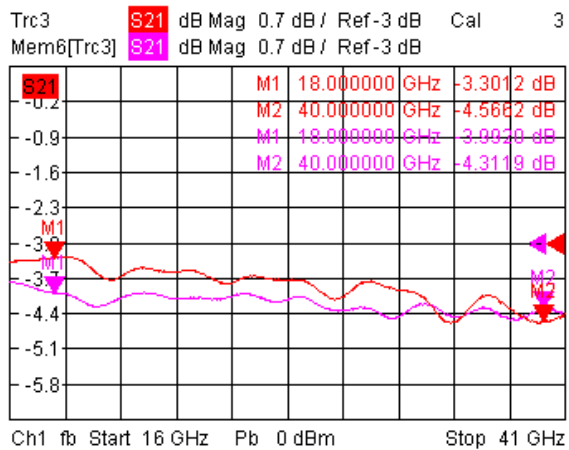

### Phase Unbalance

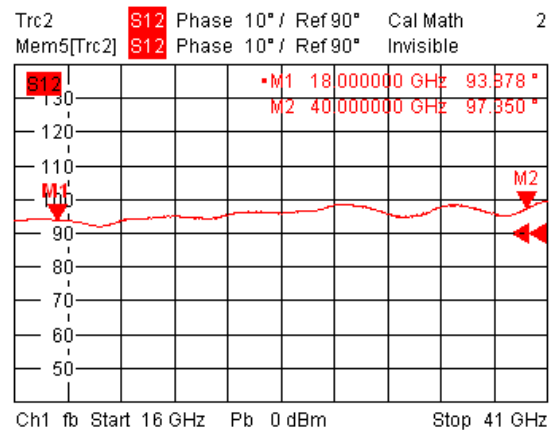

### Isolation

